

LBB 9099/10 Unidirectional Handheld Microphone

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Dynamic transducer
- ▶ Unidirectional handheld microphone
- ▶ High speech intelligibility
- ▶ Rugged construction
- ▶ Modern nonreflective dark gray finish

This unidirectional handheld microphone provides cost-effective, high-quality speech intelligibility and is fully compatible with other public address equipment. It is based on a dynamic transducer element in a sturdy housing with shielding against wind and wind bursts (pops). The microphone has excellent cardioid directivity, greatly reducing acoustic feedback. The microphone is intended for public address and sound reinforcement applications such as in leisure centers, assembly halls, and shops.


Functions

The LBB 9099/10 microphone features an on/off slide-switch with electrically isolated contacts for remote control switching, if required. This feature can switch off background music automatically, or sound announcement chimes when the microphone is activated.


Certifications and approvals

Region	Certification
Europe	CE


Installation/configuration notes

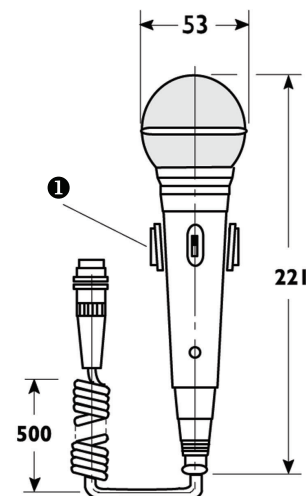


Dimensions in mm showing wall bracket (1)



Circuit diagram

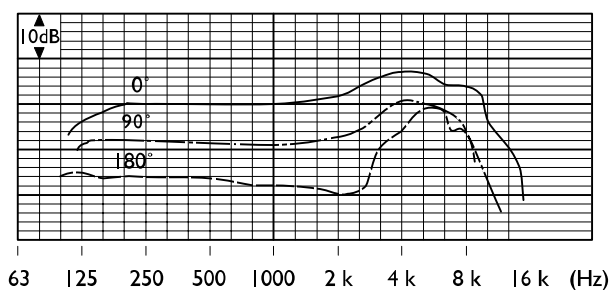

Frequency response

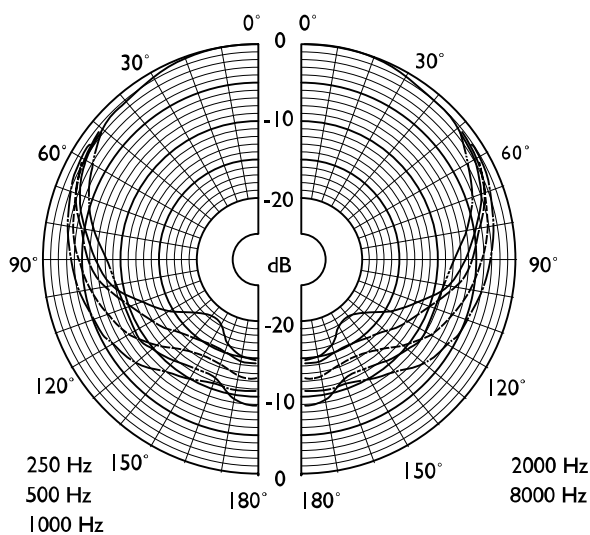

Polar diagram (measured with pink noise)

Parts included

Quantity	Component
1	LBB 9099/10 Unidirectional Handheld Microphone
1	Wall-mounting bracket

Technical specifications

Electrical*

Type	Handheld
Polar pattern	Unidirectional
Frequency range	100 Hz to 13 kHz
Sensitivity	2 mV/Pa \pm 4 dB
Rated output impedance	600 ohm

* Technical performance data acc. to IEC 60268-4

Mechanical

Dimensions (L x D)	221 x 53 mm (8.7 x 2.09 in)
Weight	420 g (0.93 lb)
Color	Dark gray
Switch	On/off with remote control contact
Cable length	0.5 m (19.7 in) coiled 1.2 m (47.2 in) uncoiled
Connector	5-pin 180° DIN (lockable)

Environmental

Operating temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Ordering information

LBB 9099/10 Unidirectional Handheld Microphone
with a lockable 5-pin DIN connector
Order number **LBB9099/10**

Accessories

LBC 1102/02 Cable Transformer
for galvanic separation
Order number **LBC1102/02**

Represented by:

Americas:

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
al.securitysystems@bosch.com
www.boschsecurity.com