

# LBB 1995/00 Plena Voice Alarm System Fireman's panel

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Remote control of the voice alarm system
- ▶ EN 54-16 and EN 60849 compliant
- ▶ Emergency (EMG) microphone
- ▶ EMG state and fault indicators
- ▶ Call monitoring loudspeaker

The Plena voice alarm remote control panels allow the system to be controlled remotely from one or two remote locations. There are five models available:

- The fireman's panel, which has oversized, illuminated controls and an all-call function
- The main RC unit, which duplicates the front panel of the Voice Alarm Controller
- The RC extension, which duplicates the front panel of the router
- The main RC kit
- The RC extension kit

The kits are a functional match to the remote control and the RC extension, with connectors on the front panel instead of controls and indicators.

## Functions

The fireman's panel is a remote control that has specialized buttons and indicators for firemen. The remote control has no zone selection, as the standard RC has, but large backlit buttons.

It is possible to enter or acknowledge the emergency state, and acknowledge and reset the fault state. Emergency or alert messages can be started, and live calls can be made.


An LED meter shows the presence and level of the calls that are active in the system. The fault indicators show detailed information of a fault in the system. Connection to the Plena Voice Alarm System is via standard, shielded CAT-5 cable and RJ45 connectors. The included rack mounting brackets can also be used to mount the units to a rear wall with spacing for cables, and even to a flat surface above or below the unit.

## Certifications and approvals

Safety	acc. to EN 60065
Immunity	acc. to EN 50130-4
Emission	acc. to EN 55103-1
Emergency	acc. to EN 54-16 / EN 60849

Region	Certification	
Europe	CE	Declaration of Conformity
	CPD	
Poland	CNBOP	

### Installation/configuration notes

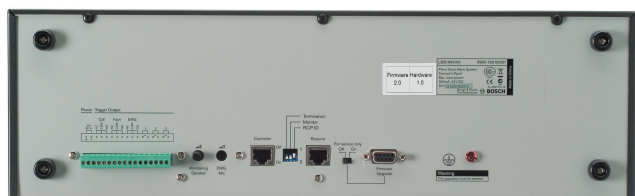

LBB 1995/00 rear view

### Parts included

Quantity	Component
1	LBB 1995/00 Plena Voice Alarm System Fireman's panel
1	Set of 19" mounting brackets
1	EMG microphone and cable
1	EMG mic mounting clip
1	1 m CAT-5 cable

### Technical specifications

#### Electrical\*

Power supply	
Voltage	24 VDC, +20% / -10%
Current typical	100 mA
Current max (indicator test)	250 mA
Priority relay contacts	30 V, 1 A
Emergency relay contacts	30 V, 1 A

\* Technical performance data acc. to IEC 60268-3

#### Mechanical

Dimensions	134 x 430 x 90 mm (19" wide, 3U high)
Weight	Approx. 3 kg
Mounting	19" rack or wall
Color	Charcoal

#### Environmental

Operating temperature	-10 °C to +55 °C (14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

### Ordering information

**LBB 1995/00 Plena Voice Alarm System Fireman's panel**  
all-call EVAC remote control with microphone  
Order number **LBB1995/00**

#### Accessories

##### **PLN-VASLB-NL Plena VAS labels, Dutch (10 pcs)**

Dutch, set of 10 pieces, and can be placed on the front panel

Order number **PLN-VASLB-NL**

##### **PLN-VASLB-DE Plena VAS labels, German (10 pcs)**

German, set of 10 pieces, and can be placed on the front panel

Order number **PLN-VASLB-DE**

##### **PLN-VASLB-FR Plena VAS labels, French (10 pcs)**

French, set of 10 pieces, and can be placed on the front panel

Order number **PLN-VASLB-FR**

##### **PLN-VASLB-SE Plena VAS labels, Swedish (10 pcs)**

Swedish, set of 10 pieces, and can be placed on the front panel

Order number **PLN-VASLB-SE**

##### **PLN-VASLB-PL Plena VAS labels, Polish (10 pcs)**

Polish, set of 10 pieces, and can be placed on the front panel

Order number **PLN-VASLB-PL**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com