
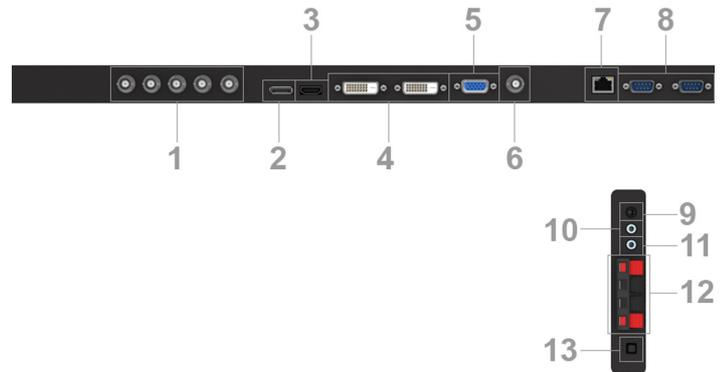


NEC MultiSync® V552

Order Code: 60003396

NEC LCD 55" Value Large Format Display

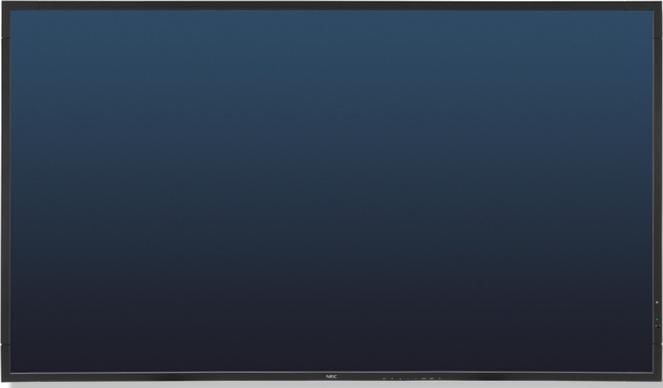

MultiSync® V552 is one of the first large format displays to feature a professional LCD panel with Edge LED backlights. Thanks to this new backlight technology, power consumption, weight and depth could be further reduced from the mark set by its predecessor. This generation of V Series features NEC OPS Slot and allows for the seamless integration of various PC boards, HDS/DSI interfaces and other OPS compatible products.

Ideal for cost efficient retail signage, conferencing applications and lobby or reception installations.

BENEFITS

Programmable Ambient Light Sensor - for reduced power consumption and eye pleasing brightness levels.

Unique NEC heat management - enables the user to monitor and control the heat inside the display with user controllable fans. Heat management is crucial for larger walls and mission critical installations to secure reliability and longevity.

DICOM support- for medical applications.

Ease of Installation and Operation - free LAN control software for central, convenient and cost-efficient maintenance and control. Automatic alarm emails notify the user of problems if they should occur.

Free Download of Multi-Display Management Software - with NaViSet Administrator 2 you can manage all your connected display devices from a centralized location.

FULL HD
1080p



NaViSet
Administrator 2

| | | |
|---------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DISPLAY | Panel Technology | AMVA3 with Edge LED backlights |
| | Active Screen Area (W x H) [mm] | 1,209.6 x 680.4 |
| | Screen Size [inch/cm] | 55 / 140 |
| | Aspect Ratio | 16:9 |
| | Brightness [cd/m ²] | 450, 173 Eco (shipment setting) |
| | Contrast Ratio (typ.) | 4000:1 |
| | Viewing Angle [°] | 178 horizontal / 178 vertical (typ. at contrast ratio 10:1) |
| | Response Time (typ.) [ms] | 6.5 (grey-to-grey) |
| | Panel Refresh Rate [Hz] | 60 |
| | Haze Level [%] | 11 |
| | Supported Orientation | Landscape; Portrait |
| SYNCHRONISATION RATE | Horizontal Frequency [kHz] | 31.5 - 91.1 (analog and digital) |
| | Vertical Frequency [Hz] | 25.2 - 85 |
| RESOLUTION | Native Resolution | 1920 x 1080 at 60 Hz |
| | Supported on digital and analogue inputs (PC) | 1920 x 1080; 1680 x 1050; 1600 x 1200; 1400 x 1050; 1366 x 786; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 768; 1280 x 720; 1140 x 900; 1024 x 768; 800 x 600; 720 x 576; 720 x 480; 720 x 400; 640 x 480 |
| | Supported on digital inputs (Video) | 1920 x 1080i (59.94/60)16:9; 1920 x 1080p (59.94/60)16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25)16:9; 1920 x 1080p (29.97/30)16:9; 1280 x 720p (50)16:9; 720 x 576p (50)16:9; 720 x 480p (59.94/60)16:9 |
| CONNECTIVITY | Input Video Analogue | 1 x D-sub 15 pin; Composite (BNC); RGBHV for PC and Component/Composite (BNC) |
| | Input Video Digital | 1 x DisplayPort; 1 x DVI-D (with HDCP); 1 x HDMI 1.3 |
| | Input Audio Analogue | 1 x 3.5 mm jack |
| | Input Audio Digital | 1 x HDMI; DisplayPort |
| | Input Control | LAN 100Mbit; remote control wire (3.5mm jack); RS232 |
| | Output Video Digital | 1 x DVI-D |
| | Output Audio Analogue | 3.5mm jack |
| | Output Control | RS232 |
| | Remote Control | LAN with SNMP; Remote Control IR (internal/external (optional) sensor); RS-232C (9-pin D-sub) Input and Output |
| OPTION SLOT | Slot Technology | STV2 (compatible with Intel / NEC OPS standard) |
| | Inrush Current [A] | max. 10 |
| | Power Consumption [W] | max. 61 |
| | Voltage / Current [V/A] | 16/4 |
| ELECTRICAL | Power Consumption [W] | 57 Eco (shipment setting), 130 |
| | Power Savings Mode [W] | < 0.5 (ECO Standby); < 1 |
| | Power Management | VESA DPMS |
| ENVIRONMENTAL CONDITIONS | Operating Temperature [°C] | +0 to +40 |
| | Operating Humidity [%] | 20 to 80 |
| | Storage Humidity [%] | 10 to 90 |
| | Storage Temperature [°C] | -20 to +60 |
| MECHANICAL | Dimensions (W x H x D) [mm] | Without stand: 1,249.7 x 720.5 x 63.5 |
| | Weight [kg] | Without stand: 26.5 |
| | Bezel Width [mm] | 18.3 (left and right); 18.3 (top and bottom) |
| | VESA Mounting [mm] | 300 x 300 (FDMI); 4 holes; M6 |
| ADDITIONAL FEATURES | Special Characteristics | Advanced fan control; Automatic Alarm E-Mails; Copy display settings through RS232; DICOM support; Hardware colour calibration possible; Input name adjustment; Matrix memory; NaViSet Administrator 2; OSD rotation for portrait mode; Scheduler; Screen saver functions; TileMatrix (10 x 10); User input priority definition; Various picture in picture options |
| | Colour Versions | Black Front Bezel, Black Back Cabinet |
| | Safety and Ergonomics | C-tick; CE; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI |
| | Plug and Play | VESA DDC2Bi |
| | Audio | Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W) |
| | Shipping Content | Display; DVI-D cable; Free LAN control software (download); Power Cable; Remote Control |
| | Warranty | 3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension |
| | Operating Hours | 24/7 |
| AVAILABLE OPTIONS | Accessories | Feet (ST-4620); Speaker (SP-RM1); Wall mount (PDW 32-70 L+P); Wall mount (PDW S 32-55 L and P) |
| | Option Slot | HD-SDI 1.5 and 3G; Intel Atom, Celeron and Core CPUs |
| GREEN FEATURES | Energy Efficiency | Ambient light sensor; Annual energy consumption: 83 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: A++ |
| | Ecological Materials | Manuals on CD; Optional feet |