

CP-X3014WN

INNOVATE
The Future of Projection



MULTI PURPOSE LCD PROJECTOR

Designed for medium sized education and corporate venues, Hitachi's CP-X3014WN allows users to wirelessly† present via a PC placed anywhere in a room. With an exceptional high contrast ratio and long life lamp the CP-X3014WN delivers a superb image, simple user functionality with a low total cost of ownership.

Performance

- XGA resolution (1024 x 768)
- 3200 ANSI Lumens
- Quick On and Auto Off
- 3000:1 Contrast ratio
- Low noise level - 29dB in Eco Mode
- 16W Speakers
- Blackboard and Whiteboard Modes
- PC-less presentation
- Multi PC Mode
- Anti Theft features:
 - PIN-Lock
 - MyScreen PIN-Lock
 - Keypad Lock
 - Kensington Lock
 - Transition Detector

Cost of ownership

- Extended Super Hybrid Filter life with up to 6000 hour filter
- Long lamp life - up to 6000 hours (Eco Mode)*
- No additional filter cleaning costs
- Easy set up and installation
- Power saving mode
- Virtually maintenance free

Advanced Network Features

- Full connectivity including 1 x RJ-45
- Optional wireless networking†
- Configure and control projector via network with a web browser
- Projector management via SNMP
- Messenger function
- Crestron RoomView®
- AMX Device Discovery
- PJ Link™
- Network Bridge

Environment

- Reduced carbon footprint by extended service intervals
- The Super Hybrid Filter reduces electronic waste
- Paint free casing
- Recyclable carton boxes
- Reduced power consumption - less than 1W in Standby Mode



Hitachi have formulated an "Environmental Vision" to contribute towards building a sustainable society through business and product development.

Our goal is to develop life-enhancing technology that will contribute to and realise a truly sustainable society for current and future generations.

†wireless is optional on this model
(USB wireless adaptor sold separately)






www.hitachidigitalmedia.com

HITACHI
Inspire the Next

CP-X3014WN

Technical specifications

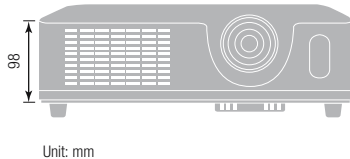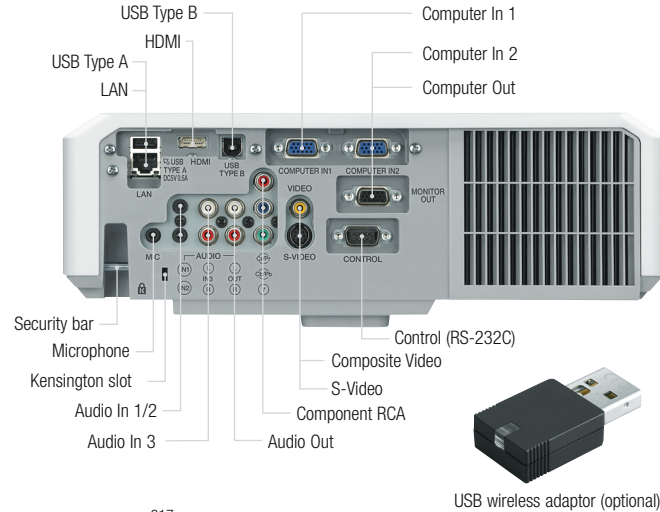

Unit: mm

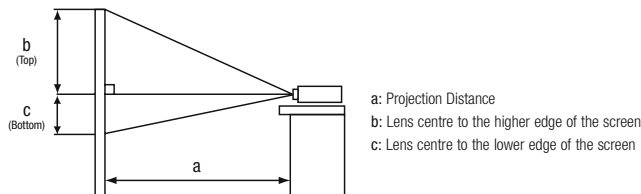


Image Size 4:3

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	0.8	1.0	41	5
40" (1.0m)	1.1	1.3	55	6
50" (1.3m)	1.4	1.7	69	8
60" (1.5m)	1.7	2.0	82	9
100" (2.5m)	2.9	3.5	137	15
200" (5.1m)	6.0	7.1	274	30
300" (7.6m)	9.0	10.7	411	46

Image Size 16:9

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	0.9	1.1	39	-1
40" (1.0m)	1.2	1.5	51	-2
50" (1.3m)	1.5	1.9	64	-2
60" (1.5m)	1.9	2.2	77	-2
100" (2.5m)	3.2	3.8	129	-4
200" (5.1m)	6.5	7.7	257	-8
300" (7.6m)	9.8	11.6	386	-12

OPTICAL

LCD Panel	0.63" (1.6cm) P-Si TFT x 3 with microlens
Resolution	XGA (1024 x 768)
Brightness	Normal Mode Eco Mode
Colour light output	3200 ANSI Lumens
Contrast ratio	3000:1
Lens	Manual focus, manual zoom x 1.2
Lamp wattage	210W UHP
Lamp life	3000 hours (Normal Mode)/6000 hours (Eco Mode)*
Diagonal display size	30~300" (76~762cm)
Number of colours	8 Bit/colour, 16.7M colours
Keystone	9:1 upward shift, fixed
Distance to width ratio (-1)	1.5 (Wide), 1.8 (Tele)

COMPATIBILITY

Computer compatibility	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA (compressed), MAC 16"
Composite/S-Video	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60
Component Video	SDTV: 480i, 480p, 576i, 576p HDTV: 720p(@50/60Hz), 1080i(@50/60Hz), 1080p(@50/60Hz)
HDMI Video	Signal: 525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)
Plug & Play	DDC2B

FEATURES

Speakers	16W Mono
Basic functions	Freeze, Magnifying, Blank, Auto adjustment, Search, Page UP&DOWN (for USB mouse function)
Picture adjustments	Equalizing Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction
Digital keystone	Auto V keystone ±30 degrees(@XGA 60Hz)
Advanced features	MyScreen, My Memory, My Button, My Text, My Source, blackboard/whiteboard mode, Daytime Mode, Input Source Naming (English), resolution setting, Template, Closed Caption (for NTSC & component 480i only), Audio pass through, source name (English)
Outward	Easy lamp replace from top, Air filter slides towards front side or top
Power on & off	Quick On, Direct On, Auto Off
Security systems	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text Lock, Security label
Network	Campus Notification System, Moderator Control Mode, Multi-Projector Mode, Configure and control projector via web browser, receive alerts via e-mail, projector management via SNMP, Crestron RoomView®, Scheduling, My Image, displaying text data transferred via the network, Command Control via network, AMX Device Discovery, PJ Link™, Network Bridge
OSD languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese(Brazil)

CONNECTIONS

Digital input	1 x HDMI
Computer input	2 x 15-pin Mini D-sub
Computer output	1 x 15-pin Mini D-sub
Video input	1 x RCA for component 2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video
Audio input	2 x Stereo Mini Jack 1 x RCA (L/R) pair 1 x Microphone Jack (stereo mini)
Audio output	1 x pair RCA (L/R)
USB Type A	1 x USB Type A (for PC-less presentation or wireless adaptor)
USB Type B	1 x USB Type B (for USB display or USB mouse control)
Wired Network	1 x RJ-45
Wireless Network	Optional, IEEE801.11b/g/n ready
Control	1 x 9-pin D-sub for RS-232C control

POWER

Power supply	100-120V/220-240V, auto switching
Power Consumption/Standby	310W/<1W

PHYSICAL

Dimensions (W x H x D)	317 x 98 x 288mm (excluding feet and extrusions)
Weight	3.5Kg
Noise level	29dB (Eco Mode)/36dB (Normal Mode)
Air filter	Super Hybrid

MISCELLANEOUS

Indicator lights (lamp, temp, power), Ceiling mount image, Rear projection image, Serial number label on side, MAC PC support: PJ Control software, MAC PC support: LiveViewer software

CERTIFICATION

'UL60950/C-UL, FCC Part 15 Class B, 'CE, AS/NZS CISPR22 ClassB

ACCESSORIES SUPPLIED

Remote control with batteries (HL02483), Computer cable, Power cord, Lens cap, Security label, User manual (detail & concise), Application software for LAN display

OPTIONAL ACCESSORIES

Replacement lamp	DT01021
USB wireless adaptor	USB-WL-11N

WARRANTY

Projector warranty	3 Years
Lamp warranty	6 Months**



HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM

Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 163 www.hitachidigitalmedia.com

*The stated lamp and filter life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps and filters should achieve this figure. **Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Crestron® and RoomView™ are registered trademarks or trademark of Crestron Electronics, Inc. The specification above and photography is for reference only and may be subject to change.