


Houses of worship

Ticket window, bank counter, reception desk, restaurant


- Microphone with rugged, all-metal body
- Frequency response optimized for intelligibility
- Long useful life even in tough day-to-day usage
- Frequency response tailored to speech use
- No phantom power required



D 542 ST-S

Rugged, affordable dynamic cardioid announcement microphone set for communications use. The microphone is mounted on a table stand with a built-in ON/OFF switch and coiled cable with 3-pin XLR connector for "plug & play" ease of use. **D 542 ST-S** provides a **frequency response tailored to speech use** for optimum intelligibility as well as **good off-axis rejection for high gain before feedback and suppression of unwanted ambient noise**. The matte gray/black, all-metal body ensures a long useful life for the microphone even in rough day-to-day use.

Item number:
D 542 ST-S 6000H1460

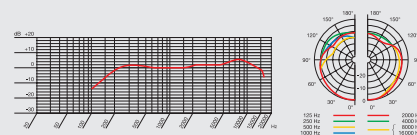

• Polar pattern:	cardioid
• Frequency range:	150 to 15,000 Hz
• Sensitivity:	2.2 mV/Pa (-54 dBV)
• Max. SPL for 1% THD:	133 dB
• Equivalent noise level:	21 dB-A
• Signal/noise ratio (A-weighted):	73 dB
• Impedance:	≤530 ohms
• Recommended load impedance:	≥2,000 ohms
• Connector:	3-pin male XLR
• Cable:	approx. 50 to 100 cm (20 to 40 in.), coiled
• Finish:	matte grey/black
• Dimensions:	microphone: 34 dia. x 345 mm (1.3 dia. x 13.5 in.) gooseneck: dia. 13 x 300 mm (0.51 x 11.8 in.); table stand (l x w x h): 160 x 120 x 65 mm (6.3 x 4.7 x 2.5 in.)
• Net/shipping weight:	805/1,125 g (1.8/2.5 lbs.)