

FULL HD 64.53" widescreen professional monitor finished in an elegant stainless steel brushed frame

Ref. **AH65S I**

GENERAL SPECIFICATIONS

LCD type	FULL HD 64.53" TFT Active Matrix widescreen. LED Backlight
Cabinet	Front steel brushed frame with a protection and decorative serigraphy glass
Controls	Digitals

DISPLAY

Brightness	450cd/m ²
Contrast ratio	4000:1
Resolution (dots)	1920 (h) x 1080 (v)
Pixel	0.744 x 0.744 mm
Viewing angle	89°/89° (u/d) / 89°/89° (l/r)
Viewing area	1428.48 (h) x 803.52 (v) mm
LED life time (Backlight)	50,000 hrs

INPUTS & OUTPUTS

Data input	RGB SubD 15 (1 input) DVI (1 input) CVBS (optional)
-------------------	---

ELECTRICAL

Power supply	100/240 Vac, 47/63Hz
Power consumption	450W

MECHANICAL

Dimensions	1,556 x 930 x 95.5 mm [61.26"x36.61"x3.76"]
Weight	TBD

OTHER

Response time	Tg-g 8 ms
Temperature	Operating +0°C ~ +40°C, Storage -20°C ~ +60°C
RS232	Monitor control




ARTHUR HOLM

Albiral Display Solutions SL
 Fàtima 25, Sant Hipòlit de Voltregà
 08512 Barcelona – Spain
 TEL: +34 93 850 23 76 / 23 83
 FAX: +34 93 850 25 50
 WEB: www.arthurholm.com
 E-MAIL: marketing@arthurholm.com

Professional 65" widescreen monitor finished in an elegant stainless steel brushed frame with a protection and decoration serigraphy glass, rear controls

Ref. AH65S I

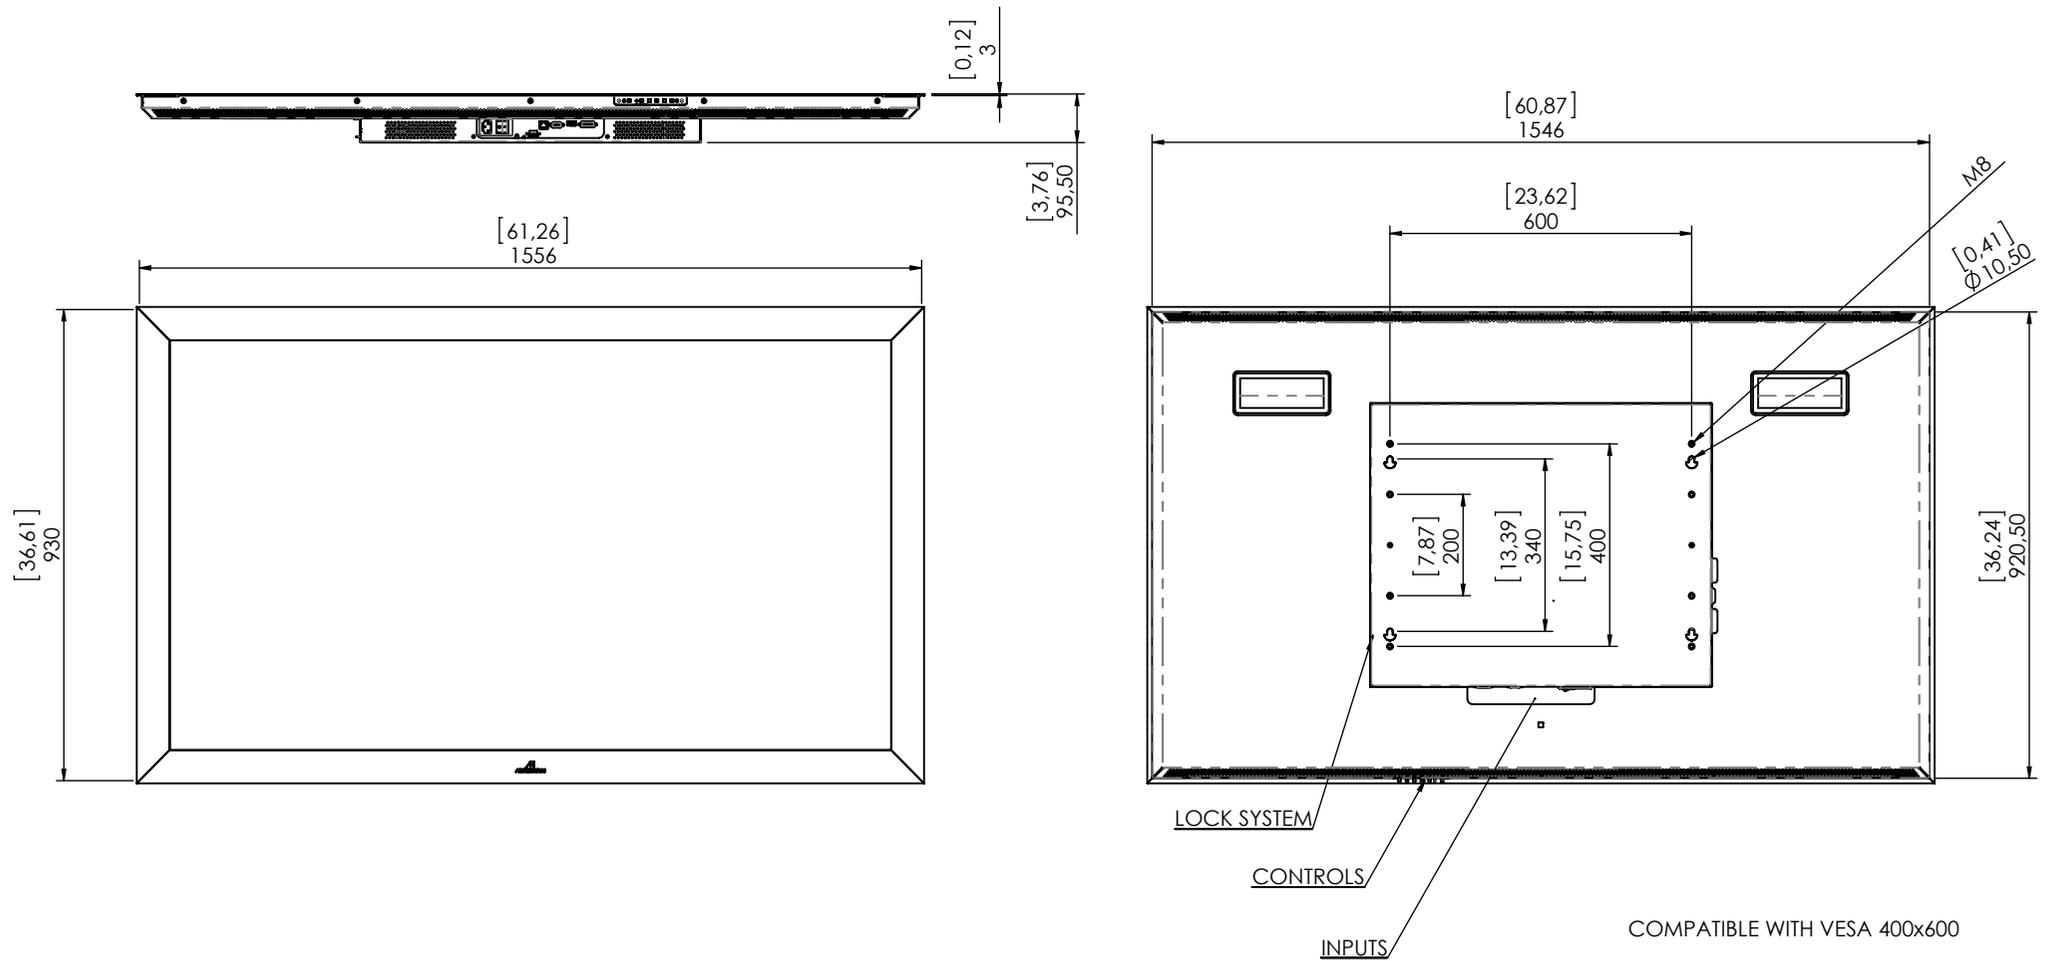

GENERAL DIMENSIONS

Scale 1:15
Dimensions in millimeters [inches]
Revision: 0
Projection:

ARTHUR HOLM

Albiral Display Solutions SL
Fàtima 25, Sant Hipòlit de Voltregà. 08512 Barcelona (SPAIN)
TEL: +34 93 850 23 76 / 23 83 FAX: +34 93 850 25 50
WEB: www.arthurholm.com EMAIL: marketing@albiral.com