


Conference Houses of worship Lectern

- Rugged construction
- Compatible with all Modular Series capsules
- Highly reliable contacts for capsule modules
- Integrated LED ring status indicator
- Integrated, switchable bass cut
- Integrated gold-plated XLR connector

Some References:

SWEDEN: Hässeholms Kulturhus, Varberg Town Hall
CHINA: Tong Zhou Qu Financial Department
NEW ZEALAND: Parliament
NORWAY: Froland Church

GN E Series

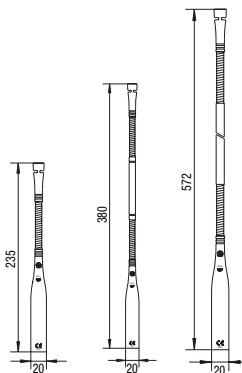


All E-Series modules come with an **integrated connector** for quick setup and takedown. The goosenecks are available in various lengths. GN 15 E: 23.5 cm (9.2 in.); GN 30 E: 38 cm (15 in.); GN 50 E: 57.2 cm (22.3 in.). Of course the GN E series also has an integrated 250 Hz **bass rolloff filter** and **LED ON/OFF jumper**.

Optimum suppression of structure-borne noise

An essential feature of the installation hardware described below is the attenuation of structure-borne noise that prevents the transmission of unwanted noise (footfall etc.). The amount of attenuation is determined by the material mix of the rubber shock mount. Modular Series installation modules use a mixture that is extremely efficient at frequencies below 250 Hz (e.g., knocking noise). Unlike standard rubber mixtures (fig. 1) that respond to vibrations very slowly, the special AKG rubber mixture (fig. 2) absorbs vibrations practically immediately. This prevents successive shocks from adding up. This rubber mixture is used in the H 600 and H 500.

Item numbers:

GN 15 E 2765Z0002
GN 30 E 2765Z0004
GN 50 E 2765Z0009

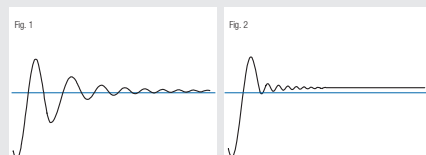

PS 3 F-Lock included



H 500: Optional shock mount



H 600: Optional theft-proof shock mount

- **Bass rolloff filter:** 250 Hz, -10 dB at 50 Hz
- **Impedance:** ≤600 ohms
- **Recommended load impedance:** ≥2,000 ohms
- **Powering:** 9 to 52 V phantom power
- **Current consumption:** ≤3 mA
- **Connector:** 3-pin male XLR
- **Finish:** matte dark grey
- **Dimensions:** max. dia.: 20 mm (0.8 in.), length: 235/380/572 mm (9/14.9/22.3 in.)
- **Net/shipping weight:** 112/396 g (3.9/13.9 oz.), 160/530 g (5.6/18.7 oz.), 160/535 g (5.6/18.8 oz.)
- **Standard accessories:** DPA phantom power adapter (integrated), PS 3 F-lock
- **Optional accessories:** B 18, H 500, H 600, SA 60, ST 1, ST 45